


HUI CHUANG HYDRAULIC HOMELIFT




Jinan Huichuang Machinery Manufacturing Co., Ltd.

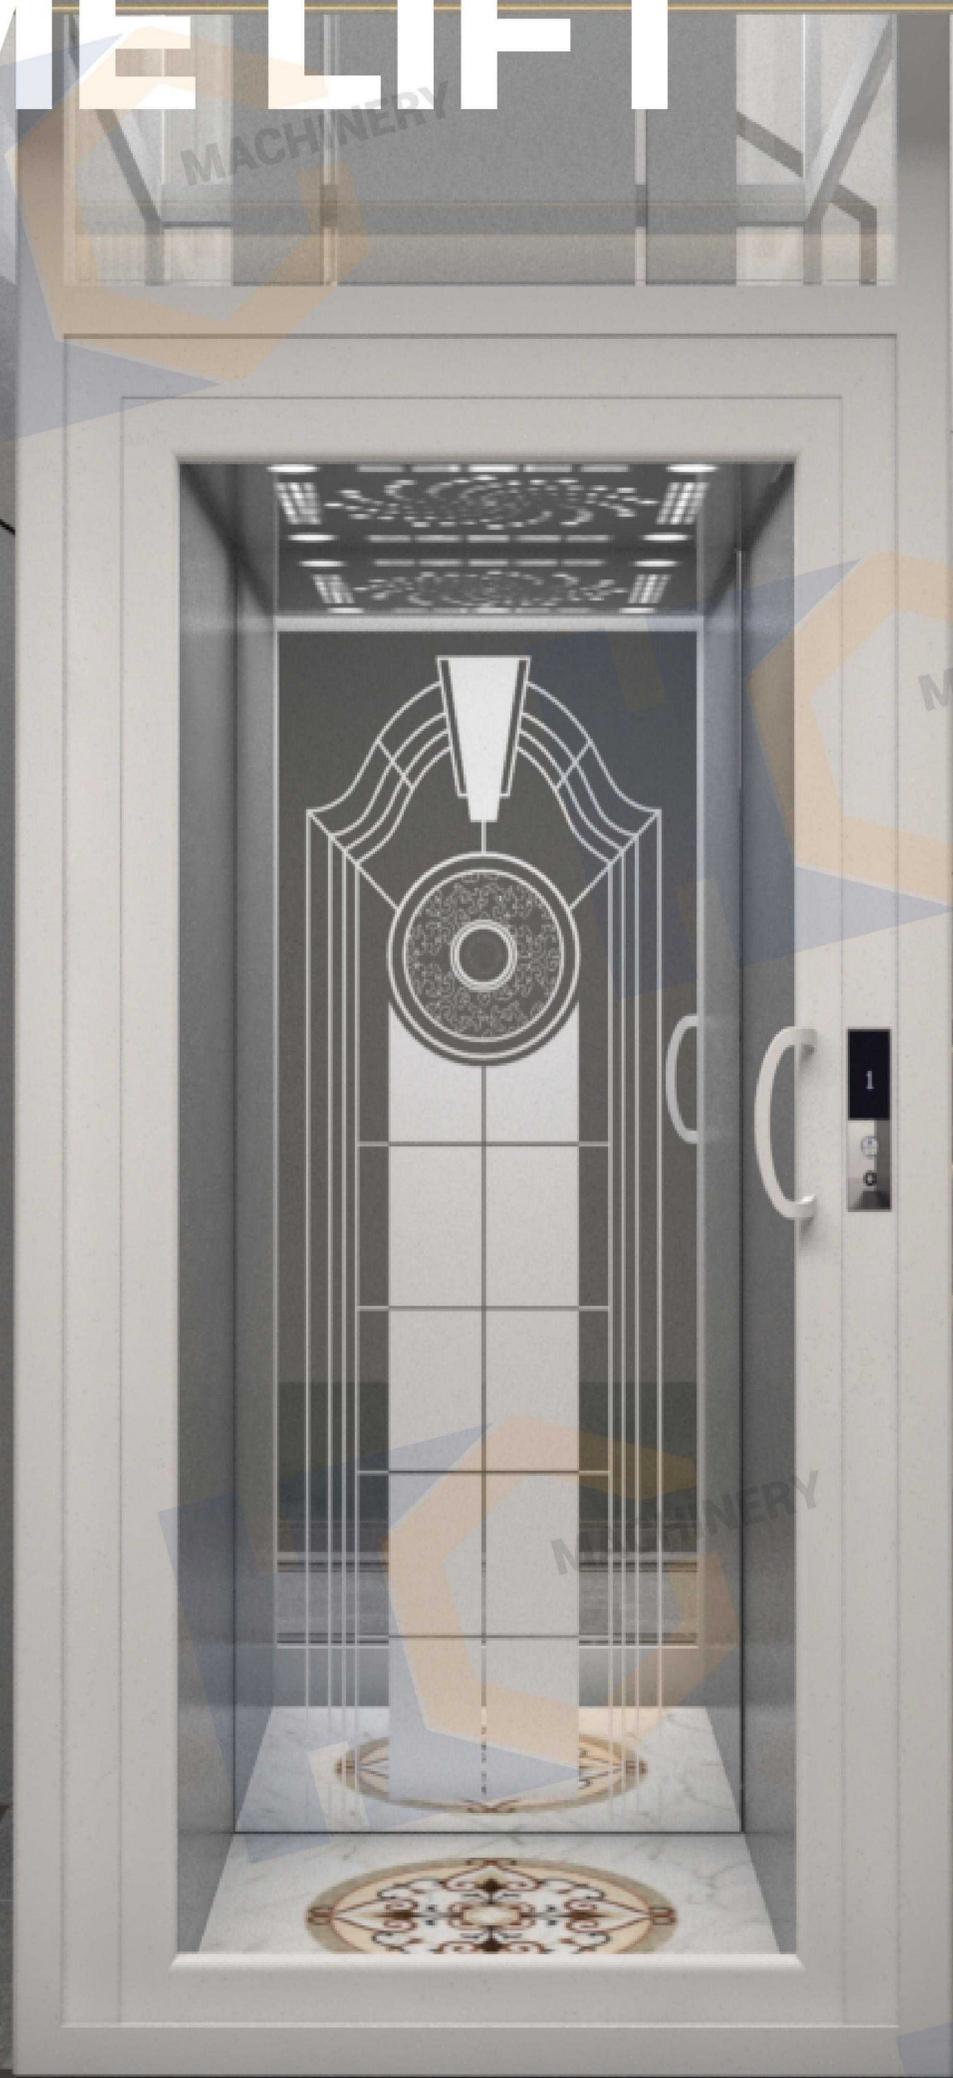


About Home Lift Solutions

HUI CHUANG HOMELIFT SOLUTIONS

We have many different colors and decorations for your choice, with or without shaft, with or without pit, with or without door, many options are provided to you, and you will find your favorite solution to match with your house.

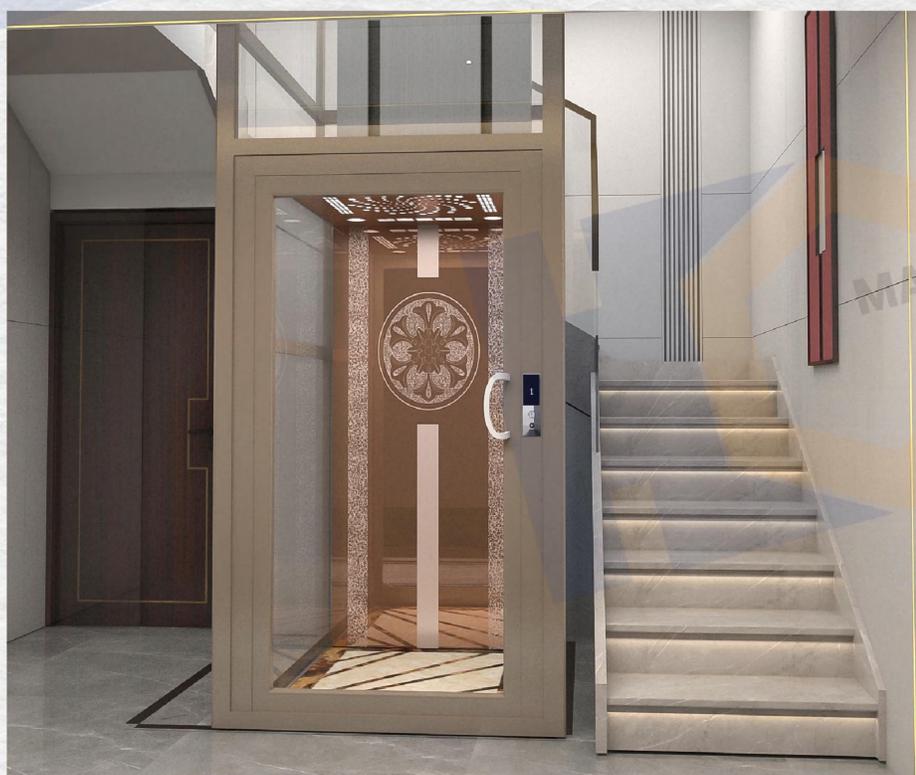

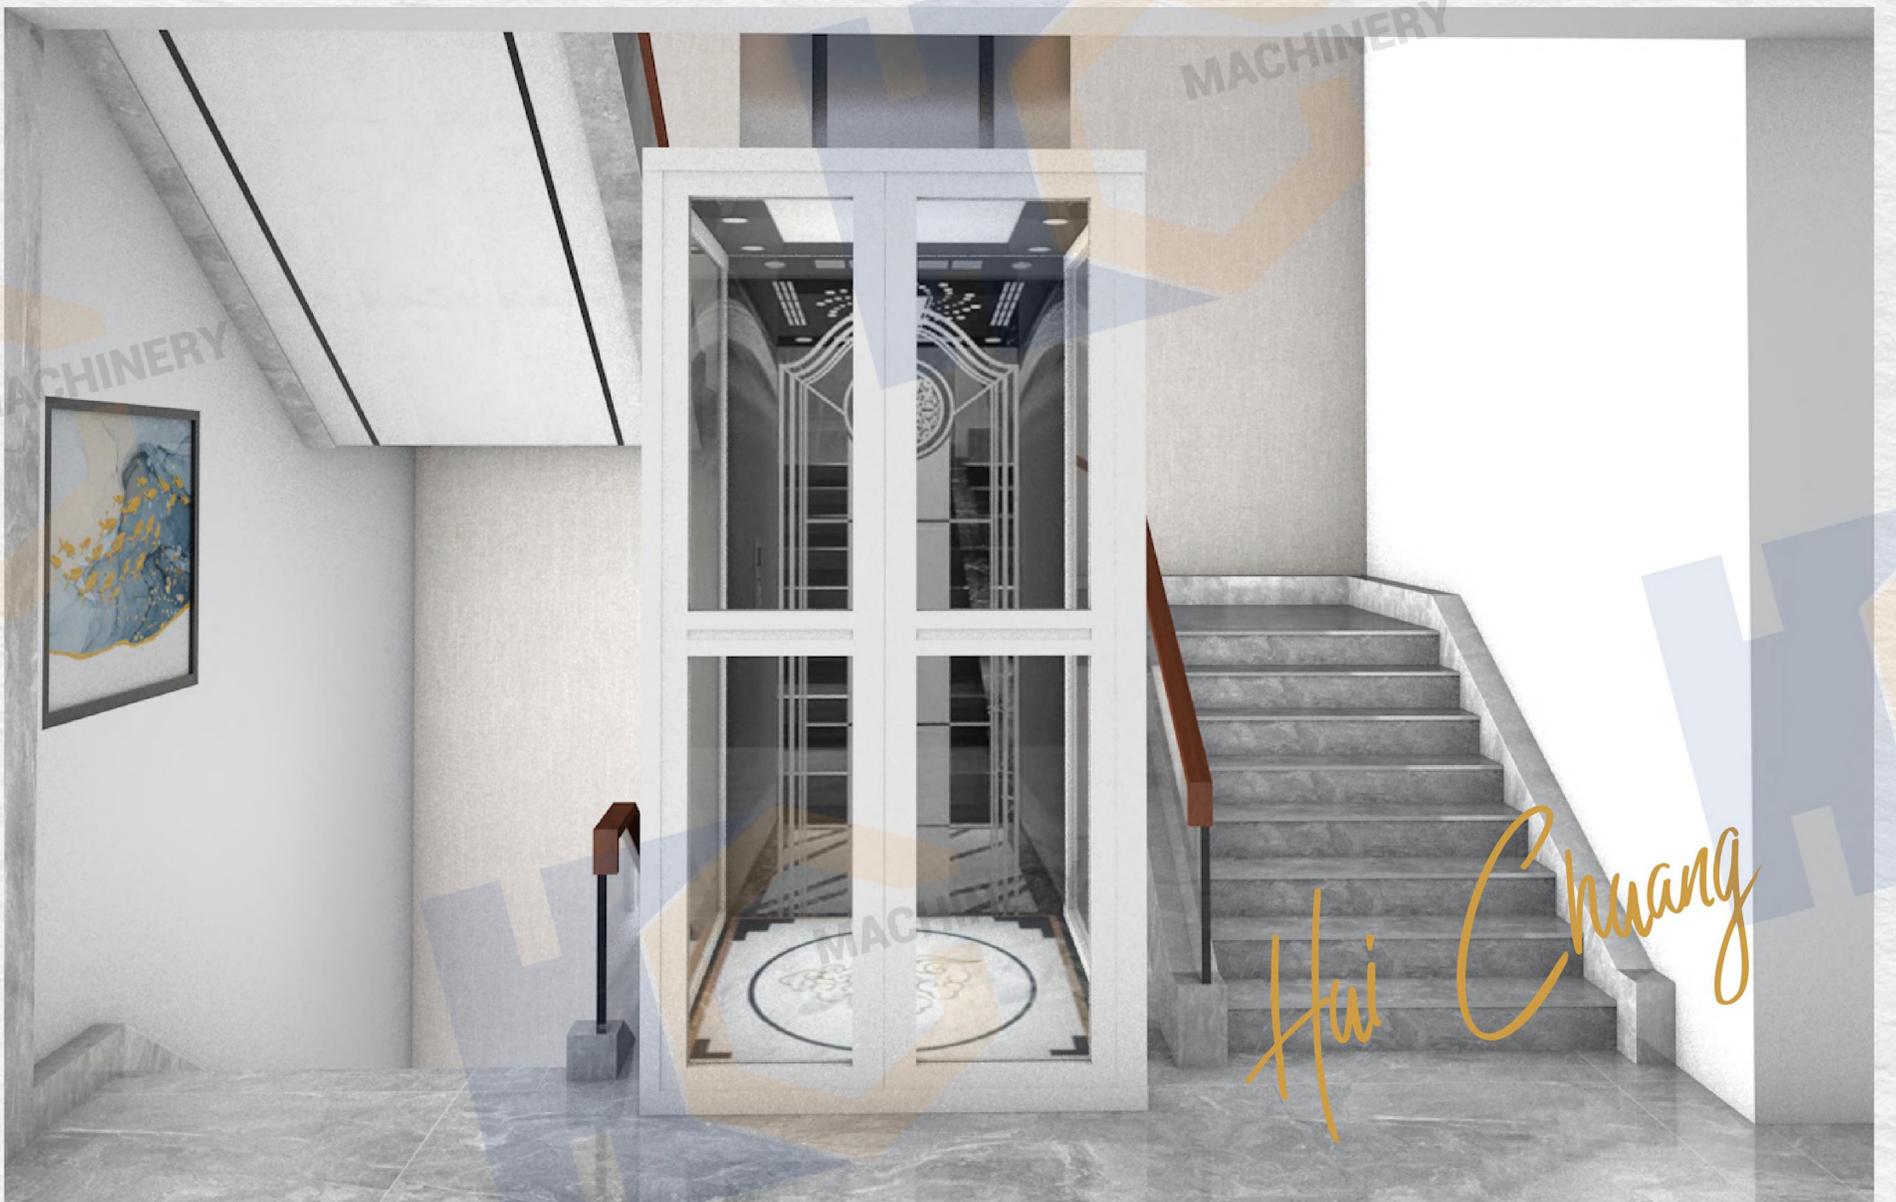

Uniquely Designed For Your Home



Small
Installation
Space

$\geq 1\text{m}^2$

LW1000*LD1000

$\geq 2.2\text{m}$

Top floor height

NUMBER



2 TO 5 FLOORS



Hydraulic
power
system

TRAVEL HIGHT

0-12000
Millimeter



RATED
SPEED

MAX 0.3m/s

Sound

$< 30\text{db}$

or

super silence
pump as optional



Power supply

220V 1-PHASE

380V 3-PHASE

Or customize



Decor Can Be
Customized

We are well aware of the importance of car interior decoration in increasing comfort and beauty, so provide each customer with personalized design solutions to make your elevator unique and show your personality and taste.



Multiple
Security
Mechanisms

Hot galvanizing structure
Oil-immersed pumping station
Light Curtain Protection




Hydraulic Home Lift Standard Configuration

Shaft Color Options



The above color is for reference only, the actual color is subject to the color card we provide.

Glass Color Options

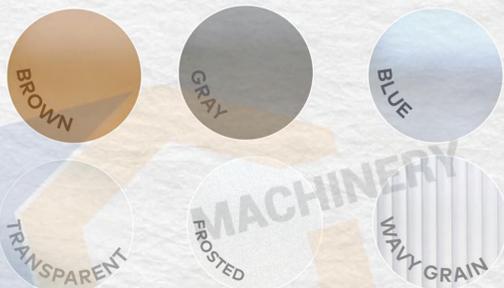

Standard Car Ceiling



Standard Car Floor



Manual Landing Door



The home lift couldn't move if the door is not closed well.

Standard LOP



Standard Car Etching Panel



Hydraulic Home Lift Optional configuration

Automatic Double Swing Door



Automatic Single Swing Door



LED Ceiling



Optional LOP



Optional COP



LED Board




Special Car Decoration




Shaft Requirement

1

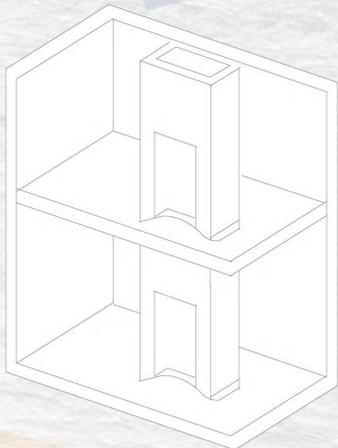


Customer built elevator shaft

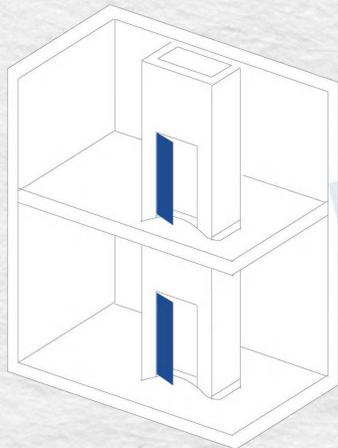


Elevator can be installed directly in the shaft

2

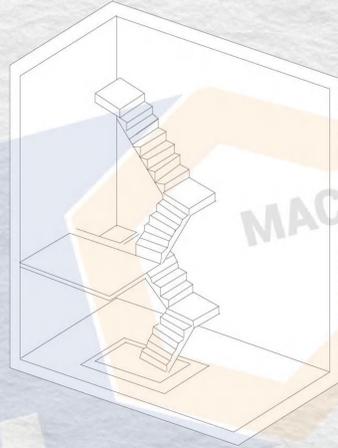


Space in the middle of stairs

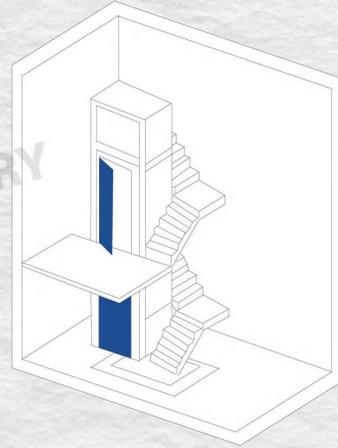


Elevator can be installed in the middle

3

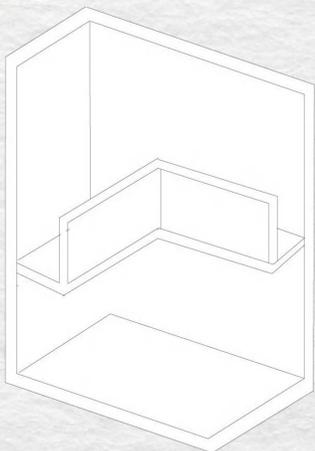


Space in the hall

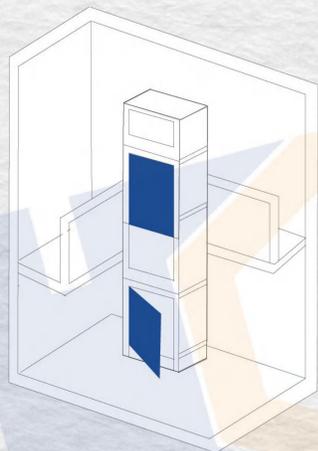


Elevator can be installed near to floorslab

4

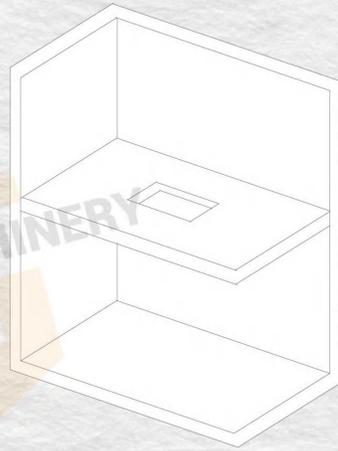


Space is floor opening

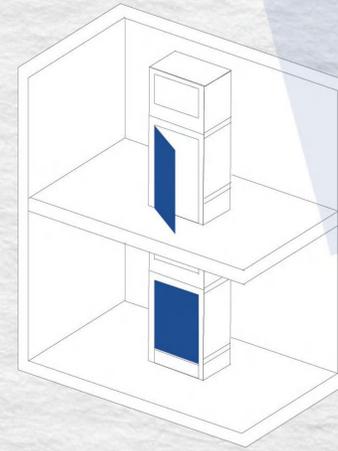


Elevator can be installed in the floor opening

5

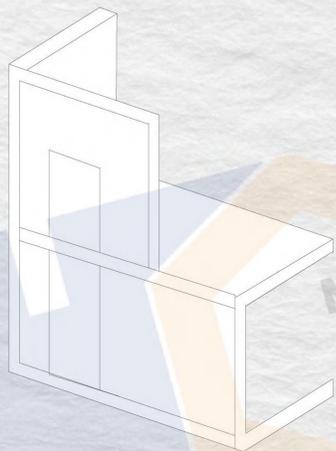







Space is outside of house

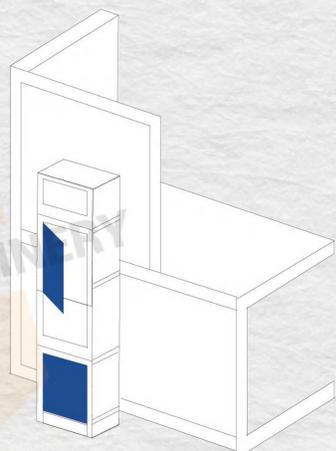

Elevator can be installed near to the wall

Huichuang home lift is shaftless model, customers can build shaft by the mselves, purchase glass shaft from us, or choose without shaft.

Hydraulic Home Lift Door Opening Direction

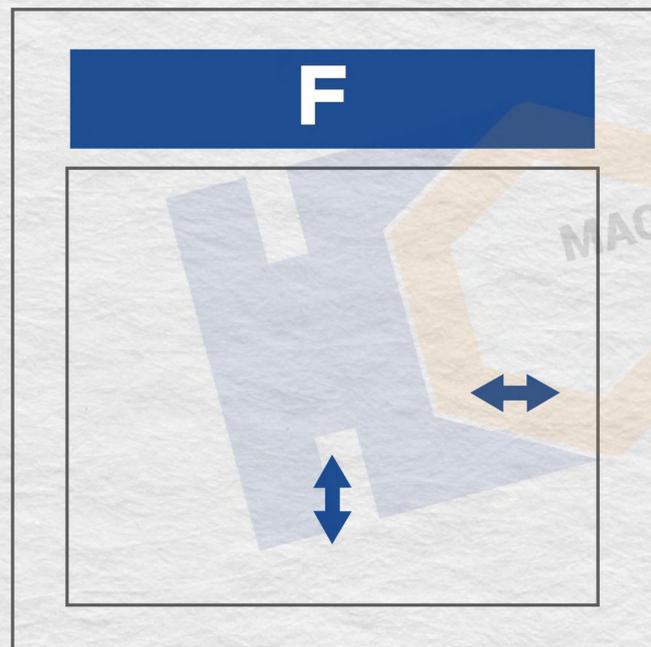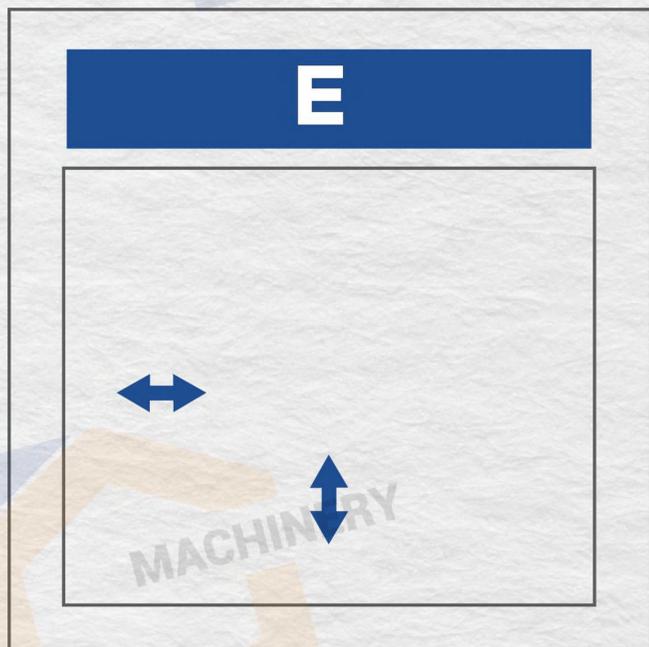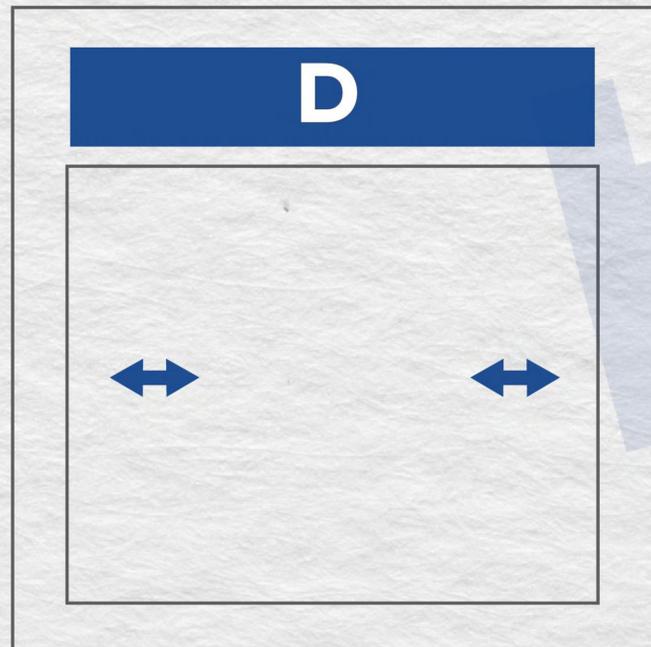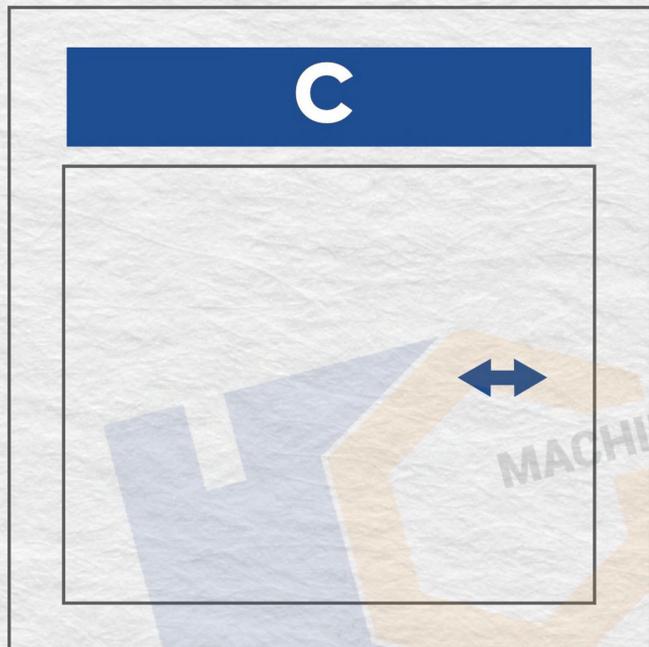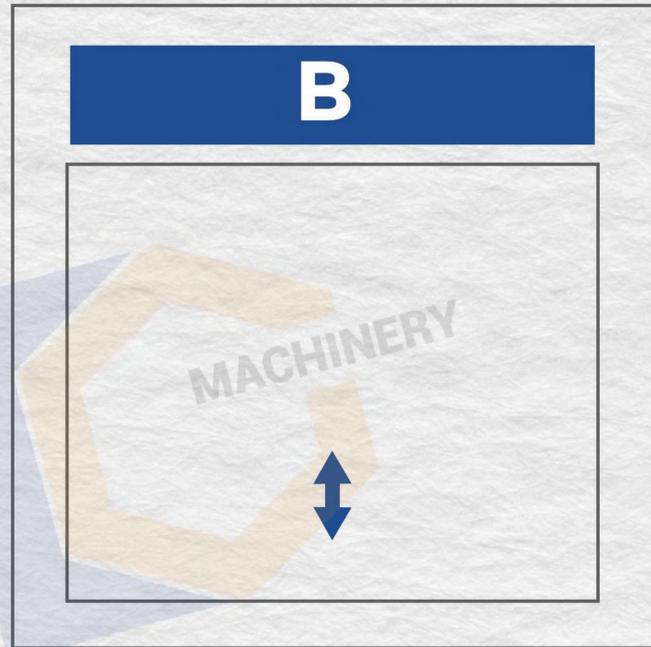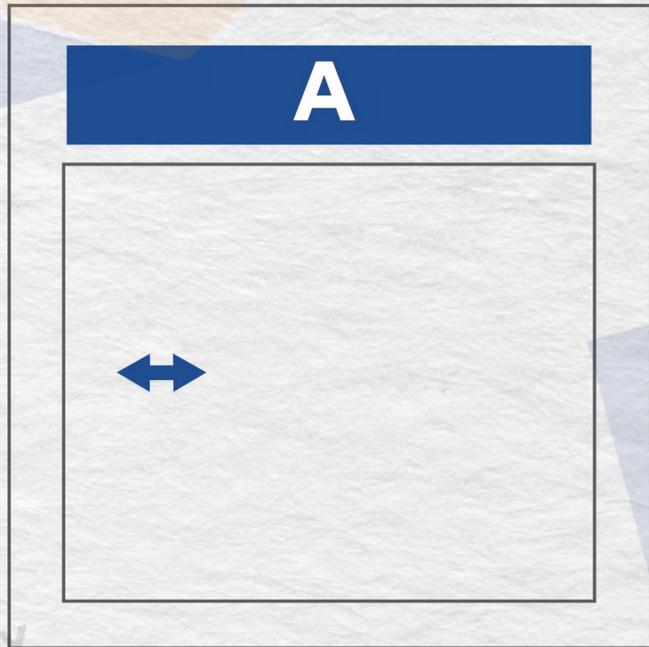

Specifications

Load Capacity(Kg)	400	Max. Floor	5
Speed(m/s)	0.3	Minimum Pit Depth(mm)	0

Configuration

Cabin decoration:

stainless steel with etching or tempered glass (different color options) cabin wall, stainless steel ceiling, PVC floor.

Safety device:

UPS, light curtain, speed governor and tensioner, bottom safety sensor.



Jinan Huichuang Machinery
Manufacturing Co., Ltd.



Add: Room 203, 2nd Floor, Building 8, Phase 2,
Intelligent Manufacturing Town,
Jibei Street, Jiyang District, Jinan City
Tel: +86 15588819902
E-mail: benlift513@hotmail.com